

INFINITY 40 COMPACT START


INFINITY
START

TROLLEY Capacity & Cycles

Trolley GN	2XGN1/1 (383x540x1750 mm)	+90°C / +3°C (90mins")	
	1XGN2/1 (590x660x1750 mm)		
Trolley EN	1XEN600x800 (660x824x1750 mm)	110kg	
	2XEN600x400 (460x624x1750 mm)		

+90°C / -18°C
(240mins")

95kg



Specifications:

Dimensions (WxDxH)	mm	1290x1176x2480
Useful Internal Dimensions:	mm	680x830x1800
Net Weight	kg	450
Refrigeration Power	W	12740 (-10/+40) 5060 (-30/+40)
Electronic Card	ARAGON Touch Screen	
Voltage & Frequency	V / Hz	400 / 3+N+T / 50
Compressor	BITZER 4EES-4Y	
Max Current Draw	A	21
Absorbed Power	W	3250 (-30/+40)
Noise	DB	74

Options (Product Code):



Tracer Application
(TRACER)



GSK Kit (SMS Alerts)
(GSMKIT)



Heated Core Probe
(SONDARISC)



Sterilizer (Ozonizer)
(STERILKIT)



Electronic Valve
(VALVEL)



Wi-Fi Supervisor Kit
(WIFISUPER)




Led Light
(LED START)



Pass through version
(PASS2040)

VENTILATION: Units must have a minimum space of 200mm for ventilation from the evaporator wall of the cabinet.

Drawings:

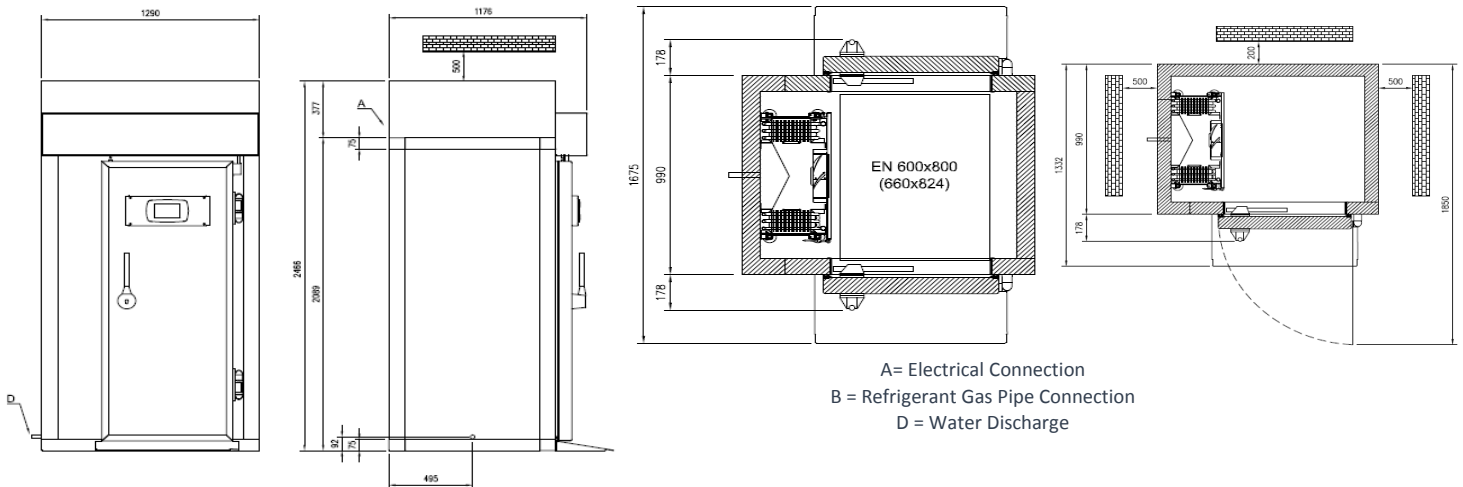

ABLE PRODUCTS
8 Guthrie Street,
Osborne Park WA 6017

P: 08 9242 7521 | F: 08 9242 7168
sales@ableproducts.com.au
www.ableproducts.com.au