



SCHEDA TECNICA	DATENBLATT	* = PAG. 202	SOUL PLATINUM		
DATASHEET	DONNÉES TECHNIQUE	⇒ = RIF. UCR			



			3/1	4/1	5/1		
MODELLO	MODELL		+4/+8 °C	+4/+8 °C	+4/+8 °C		
MODEL	MODÈLE						
VOLUME INTERNO	INTERNER RAUM	MC					
INTERNAL VOLUME	VOLUME INTERNE						
DIMENSIONI INTERNE UTILI	NUTZLICHE INTERNE ABMESSUNGEN	MM	3 x GN1/1 H200	4 x GN1/1 H200	5 x GN1/1 H200		
USEFUL INTERNAL DIMENSIONS	DIMENSION INTERNE UTILIES	LxPxH					
COMPRESSORE	KOMPRESSOR		EMBRACO	EMBRACO	EMBRACO		
COMPRESSOR	COMPRESSEUR		NT6226GK	NT6226GK	NJ9232GK		
POTENZA FRIGORIFERA	KALTELEISTUNG	W	2058 (-10/+45)	2058 (-10/+45)	2360 (-10/+45)		
REFRIGERATION POWER	UISSANCE FRIGORIFIQUE						
POTENZA ASSORBITA	LEISTUNGS-AUFNAHME	W	972 (-10/+45)	972 (-10/+45)	1089 (-10/+45)		
ABSORBED POWER	PUISSANCE ASSORBEE						
MASSIMA CORRENTE	MAX STROM-AUFNAHME	A	9.60	9.60	10.16		
MAX CURRENT	COURANT MAXIMUM						
TENSIONE E FREQUENZA	NETZSPANNUNG UND FREQUENZ	V / Hz	230 / 50	230 / 50	230 / 50		
VOLTAGE & FREQUENCY	TENSION ET FREQUENCE						
PESO NETTO	REINGEWICHT	KG	200	250	305		
NET WEIGHT	POIDS NET						
RUMORE	LAUTSTARKE	DB	61	62.3	62.5		
NOISE	BRUIT						
RIPIANI MASSIMI	MAX REGALE	N°					
MAX SHELVES	NIVEAUX MAXIMUM						
GAS REFRIGERANTE	KALTEMITTEL	GR	900 - R404A	1200 - R404A	1800 - R404A		
REFRIGERANT GAS	GAS FRIGORIGENE						
ELETTRONICA	ELEKTRONISCHES STEUERGEHAUSE		CAREL	CAREL	CAREL		
ELECTRONIC CARD	CENTRALE ELECTRONIQUE		EASY	EASY	EASY		
CLASSE CLIMATICA	KLIMATISCHE KLASSE	INDEX	3 (25°C)	3 (25°C)	3 (25°C)		
CLIMATIC CLASS	CLASSE CLIMATIQUE						
CLASSE ENERGETICA	ENERGIEEFFIZIENZKLASSE	INDEX					
ENERGY CLASS	CLASSE ENERGETIQUE						
CONSUMO ENERGIA 48H	48H STROMVERBRAUCH	KW					
48H ENERGY CONSUMPTION	CONSOMMATION 48H D'ÉNERGIE						
CONSUMO ENERGIA ANNUO	DER JAHRICHE ENERGIEVERBRAUCH	KW					
YEAR ENERGY CONSUMPTION	CONSOMMATION ANNUELLE D'ÉNERGIE						
DIMENSIONI IMBALLO	AMBENSUGGEN VERPACKUNG	MM	1233x860x1830	1558x860x1830	1883x860x1830		
PACKING DIMENSIONS	DIMENSIONS EMBALLAGE	LxPxH					
RESA ABBATTIMENTO	ERGIEBIGKEIT SCHNELLKÜHLUNG	KG					
CHILLING PERFORMANCE	RENDEMENT REFROIDISSEMENT						
RESA SURGELAZIONE	ERGIEBIGKEIT SCHOCKFROSTUNG	KG					
FREEZING PERFORMANCE	RENDEMENT CONGELATION						
VASCHETTE GELATO	EISBECHER	5L	N°				
ICE CREAM PANS	BOL DE GLACE	(165x360xH120)					

Dati tecnici soggetti a modifiche senza preavviso.

All specification subject to change without notice.

Technische Daten und Eigenschaften mit Änderungen ohne Anzeige.

Caractéristiques techniques sujettes à modification sans avis.

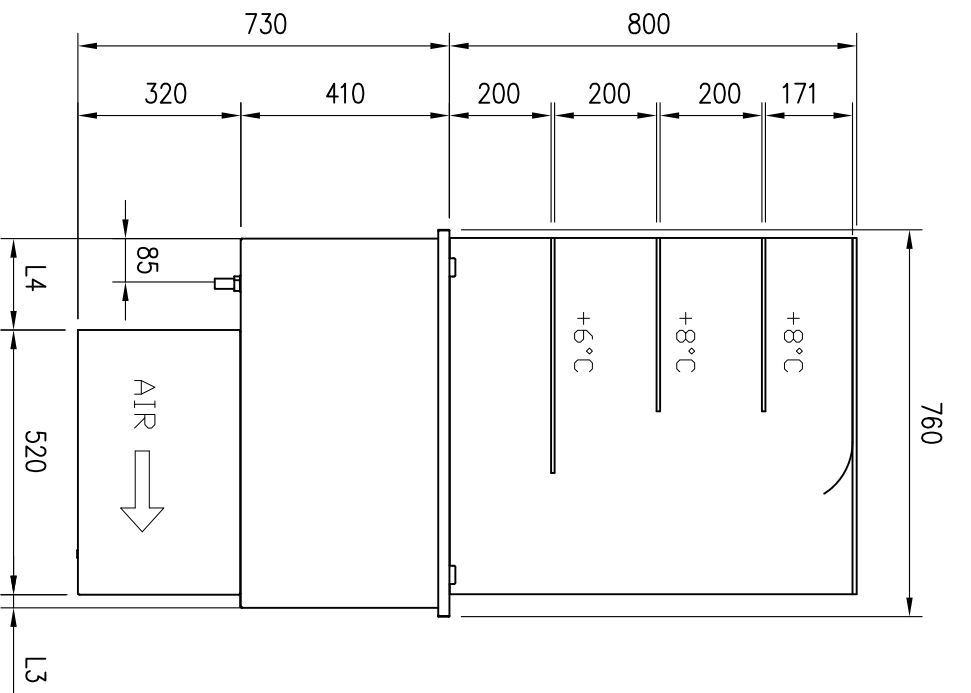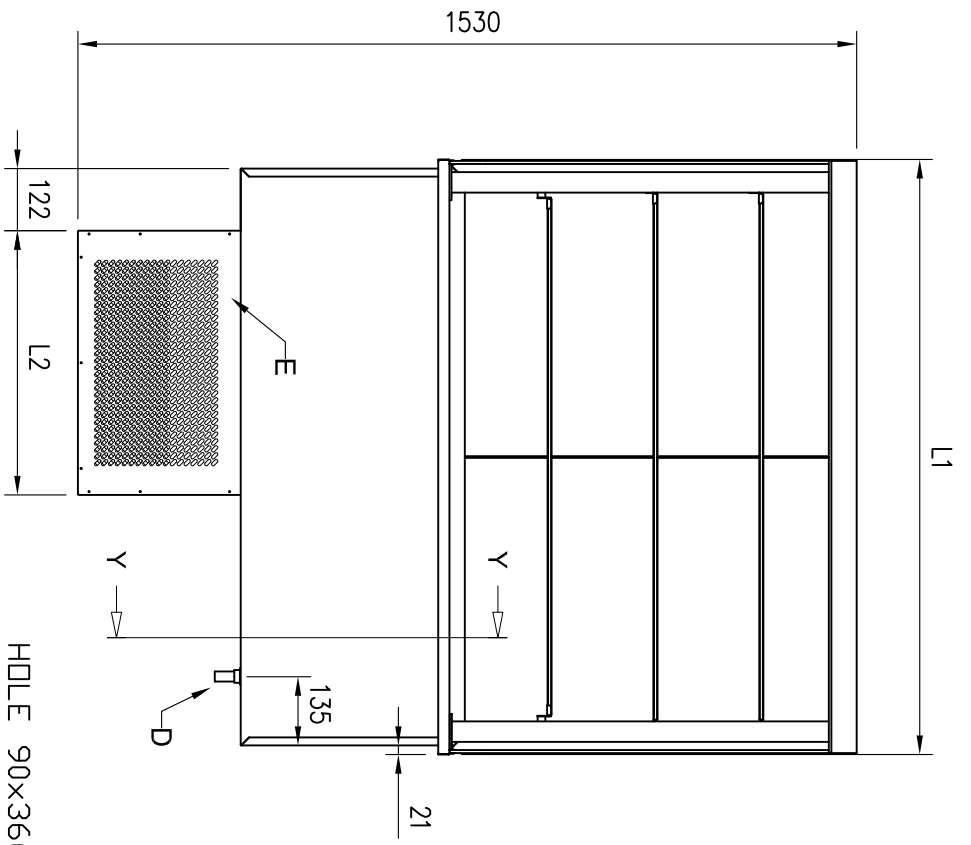

GN	L1	L2	L3	L4	HOLE
3/1	1169	519	26	172	1135x726
4/1	1494	759	46	152	1460x726
5/1	1819	759	26	172	1785x726

SDUL PLATINUM

- A= ELECTRICAL CONNECTION
- D= WATER DISCHARGE Ø16
- E= GAS CONNECTION Ø8 Ø10
- INSULATION THICKNESS 40 MM

