





SCHEDA TECNICA DATASHEET	DATENBLATT DONNÉES TECHNIQUE	* = PAG. 202 ⇒ = RIF. UCR						VRK - GN1/3
MODELLO MODEL	MODELL MODÈLE		<b>1100</b> +2/+7 °C	<b>1260</b> +2/+7 °C	<b>1340</b> +2/+7 °C	<b>1490</b> +2/+7 °C	<b>1815</b> +2/+7 °C	<b>2045</b> +2/+7 °C
VOLUME INTERNO INTERNAL VOLUME	INTERNER RAUM VOLUME INTERNE	<b>MC</b>						
DIMENSIONI INTERNE UTILI USEFUL INTERNAL DIMENSIONS	NUTZLICHE INTERNE ABMESSUNGEN DIMENSION INTERNE UTILIES	<b>MM</b> <b>LxPxH</b>	4 x GN1/3	5 x GN1/3	5 x GN1/3	6 x GN1/3	8 x GN1/3	9 x GN1/3
COMPRESSORE COMPRESSOR	KOMPRESSOR COMPRESSEUR		EMBRACO NEK6144GK	EMBRACO NEK6144GK	EMBRACO NEK6144GK	EMBRACO EMT6152GK	EMBRACO EMT6152GK	EMBRACO EMT6152GK
POTENZA FRIGORIFERA REFRIGERATION POWER	KALTELEISTUNG UISSANCE FRIGORIFIQUE	<b>W</b>	445 (-10/+45)	445 (-10/+45)	445 (-10/+45)	477 (-10/+45)	477 (-10/+45)	477 (-10/+45)
POTENZA ASSORBITA ABSORBED POWER	LEISTUNGS-AUFNAHME PUISSANCE ASSORBÉE	<b>W</b>	227 (-10/+45)	227 (-10/+45)	227 (-10/+45)	229 (-10/+45)	229 (-10/+45)	229 (-10/+45)
MASSIMA CORRENTE MAX CURRENT	MAX STROM-AUFNAHME COURANT MAXIMUM	<b>A</b>	4.66	4.66	4.66	4.82	4.82	4.82
TENSIONE E FREQUENZA VOLTAGE & FREQUENCY	NETZSPANNUNG UND FREQUENZ TENSION ET FREQUENCE	<b>V / Hz</b>	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50
PESO NETTO NET WEIGHT	REINGEWICHT POIDS NET	<b>KG</b>	30	32	35	37	42	45
RUMORE NOISE	LAUTSTARKE BRUIT	<b>DB</b>						
RIPIANI MASSIMI MAX SHELVES	MAX REGALE NIVEAUX MAXIMUM	<b>N°</b>						
GAS REFRIGERANTE REFRIGERANT GAS	KALTEMITTEL GAS FRIGORIGÈNE	<b>GR</b>	100 - R404A	110 - R404A	110 - R404A	110 - R404A	130 - R404A	135 - R404A
ELETTRONICA ELECTRONIC CARD	ELEKTRONISCHES STEUERGEHAUSE CENTRALE ELECTRONIQUE		CAREL EASY	CAREL EASY	CAREL EASY	CAREL EASY	CAREL EASY	CAREL EASY
CLASSE CLIMATICA CLIMATIC CLASS	KLIMATISCHE KLASSE CLASSE CLIMATIQUE	<b>INDEX</b>	3 (25°C)	3 (25°C)	3 (25°C)	3 (25°C)	3 (25°C)	3 (25°C)
CLASSE ENERGETICA ENERGY CLASS	ENERGIEEFFIZIENZKLASSE CLASSE ENERGETIQUE	<b>INDEX</b>						
CONSUMO ENERGIA 48H 48H ENERGY CONSUMPTION	48H STROMVERBRAUCH CONSOMMATION 48H D'ÉNERGIE	<b>KW</b>						
CONSUMO ENERGIA ANNUO YEAR ENERGY CONSUMPTION	DER JÄHRLICHE ENERGIEVERBRAUCH CONSOMMATION ANNUELLE D'ÉNERGIE	<b>KW</b>						
DIMENSIONI IMBALLO PACKING DIMENSIONS	AMBENSUGGEN VERPACKUNG DIMENSIONS EMBALLAGE	<b>MM</b> <b>LxPxH</b>	1170x460x580	1330x460x580	1410x460x580	1560x460x580	1885x460x580	2075x460x580
RESA ABBATTIMENTO CHILLING PERFORMANCE	ERGIEBIGKEIT SCHNELLKÜHLUNG RENDEMENT REFROIDISSEMENT	<b>KG</b>						
RESA SURGELAZIONE FREEZING PERFORMANCE	ERGIEBIGKEIT SCHOCKFROSTUNG RENDEMENT CONGELATION	<b>KG</b>						
VASCHETTE GELATO ICE CREAM PANS	EISBECHER BOL DE GLACE	5L (165x360xH120)	<b>N°</b>					

Dati tecnici soggetti a modifiche senza preavviso.







All specification subject to change without notice.

Technische Daten und Eigenschaften mit Änderungen ohne Anzeige.

Caractéristiques techniques sujettes à modification sans avis.

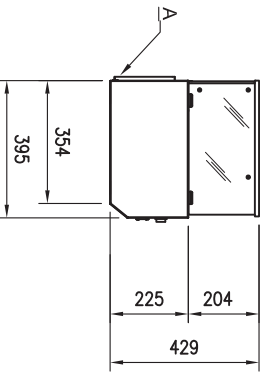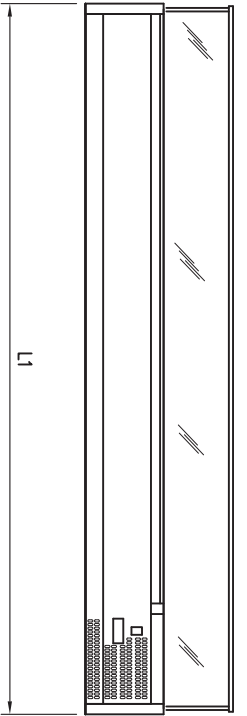

L1  
1100  
1260  
1340  
1490  
1815  
2045

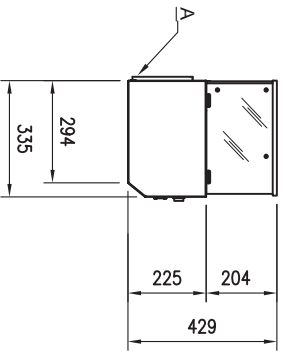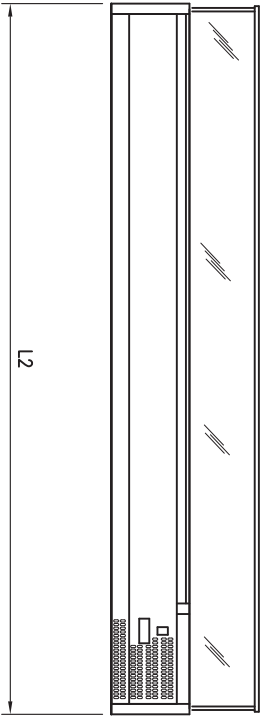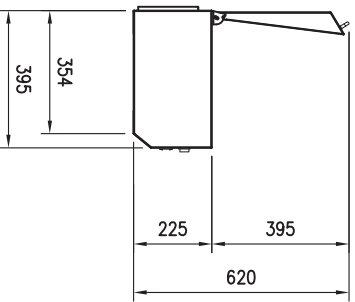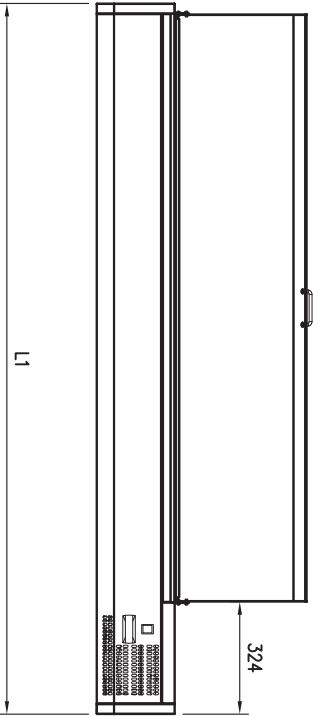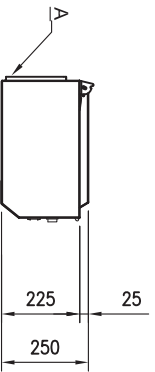

L2  
1490  
1815  
2045

VRK  
A= ELECTRICAL CONNECTION  
INSULATION THICKNESS 30 MM