

AFINOX

Temperature Range:

-2°C - **+7°C**

Energy Consumption:

Daily Energy Consumption: (kWh/24h)	2
Yearly Energy Consumption: (kWh/Annum)	629
Energy Efficiency Class:	C

Capacity:

Useful Internal Dimensions:	550x650x1385mm
Trays GN:	24 of GN2/1 (Height 40mm)

Specifications:

Dimensions: (WxDxH)	733x864x2090mm
Net Weight:	kg 134kg
Refrigerant Gas:	R290
Refrigeration Power:	W 362 (-10°C/+40°C)
Electronic Card:	EVX Digital Control & Touch Panel
Compressor:	EMBRACO EMC3117U (Hermetic)
Voltage & Frequency:	V / Hz 230 / 1Ph / 50
Max Current Draw:	A 3.8
Absorbed Power:	W 130 (-10°C/+40°C)
Noise:	DB 42 (5m)
Climate Class:	5 (40°C - 40% RH)

Features:



R290 Refrigerant:
A non-toxic gas, completely natural & ecological, with no negative environmental impact.



Humidity Control
(2 Levels - 60 & 90%)

Intelligent Defrosting System



Automatic Energy Savings Mode



90mm Thick Insulation



Over-Cooling Mode for Peak Periods



Delicate Air-Flow System Design


ENERGY 700 TN PV

Product Code:

7E070INV5A002



Optional Accessories:



Plastic coated GN 2/1 shelf

SS Pair of Runners



Castor Kit




Sterilizer (Ozonizer)

ABLE


Phone:
08 9242 7521
Head Office:
8 Guthrie Street,
Osborne Park WA 6017

Email:
sales@ableproducts.com.au
Web:
www.ableproducts.com.au

Drawings:

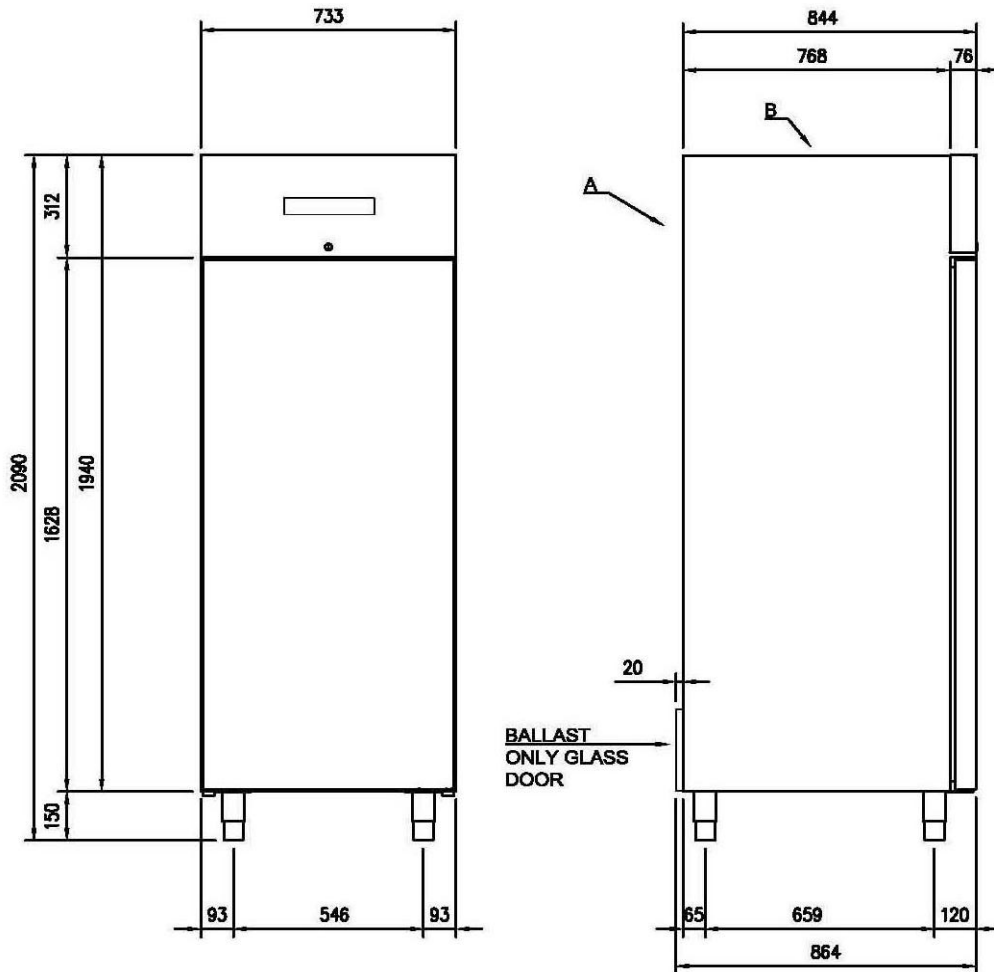

Lay-Out / Top Elevation:

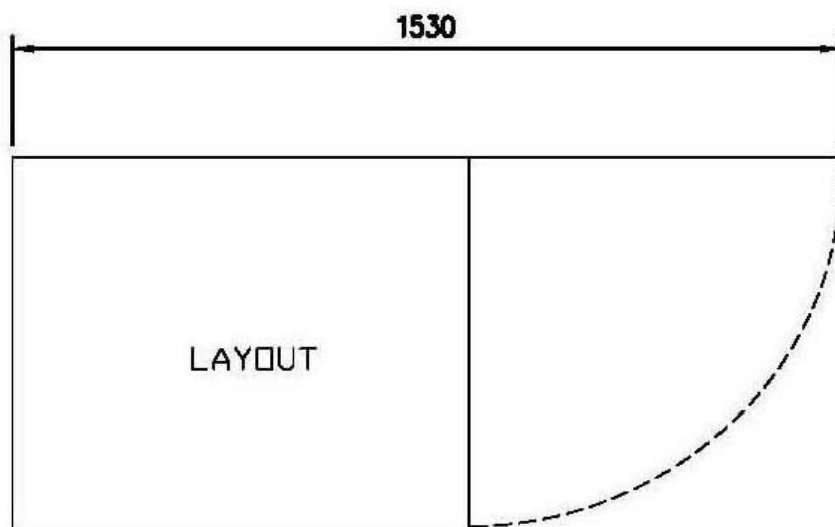

A= ELECTRICAL CONNECTION SCHUKO
 B= GAS CONNECTION $\varnothing 8$ $\varnothing 10$



Phone:
 08 9242 7521
Head Office:
 8 Guthrie Street,
 Osborne Park WA 6017

Email:
sales@ableproducts.com.au
Web:
www.ableproducts.com.au