

# AFINOX

## Temperature Range:

**-24°C - -10°C**

## Energy Consumption:

Daily Energy Consumption: (kWh/24h)	7
Yearly Energy Consumption: (kWh/Annum)	2614
Energy Efficiency Class:	D

## Capacity:

Useful Internal Dimensions:	550x650x1385mm
Trays GN:	24 of GN2/1 (Height 40mm)
5L Pans	35 of 5L Pans (165x360xH120 mm)

## Specifications:

Dimensions: (WxDxH)	733x839x2090mm
Net Weight:	kg 116kg
Refrigerant Gas:	R290
Refrigeration Power:	W 735 (-30°C/+40°C)
Electronic Card:	EV3B Digital Control
Compressor:	EMBRACO NT2180U (Hermetic)
Voltage & Frequency:	V / Hz 230 / 1Ph / 50
Max Current Draw:	A 7.21
Absorbed Power:	W 526 (-30°C/+40°C)
Noise:	DB 53 (5m)
Climate Class:	5 (40°C - 40% RH)

## Features:



**100% HYGIENIC**  
**NO FINGERPRINT TECHNOLOGY**

### The Non Smear Coating Advantages:

- Easy to clean
- Appearance & color comparable to S/Steel
- Ecological
- Suitable for food contact
- Made without using PVC

90mm Thick Insulation



Hidden Evaporator



Capacitive Digital Temperature Controller




## FROSTY 700 BT

Product Code:

7F070IBC5A001



## Optional Accessories:



Plastic coated GN 2/1 shelf

SS Pair of Runners



Castor Kit





Sterilizer (Ozonizer)

**ABLE**


**Phone:**  
08 9242 7521  
**Head Office:**  
8 Guthrie Street,  
Osborne Park WA 6017

**Email:**  
sales@ableproducts.com.au  
**Web:**  
www.ableproducts.com.au

Drawings:

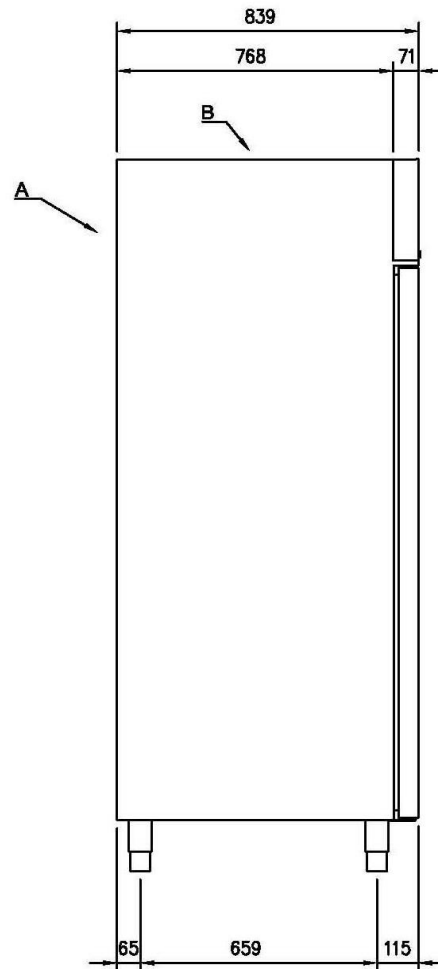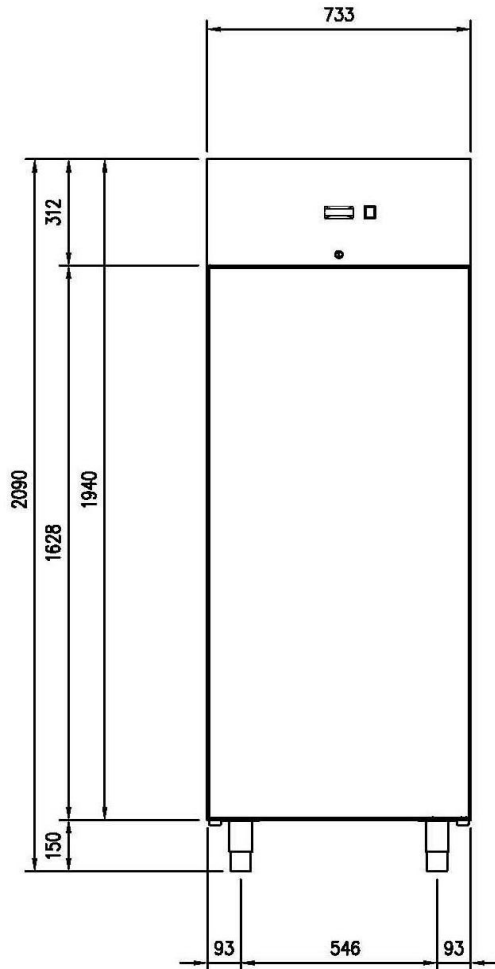

Lay-Out / Top Elevation:

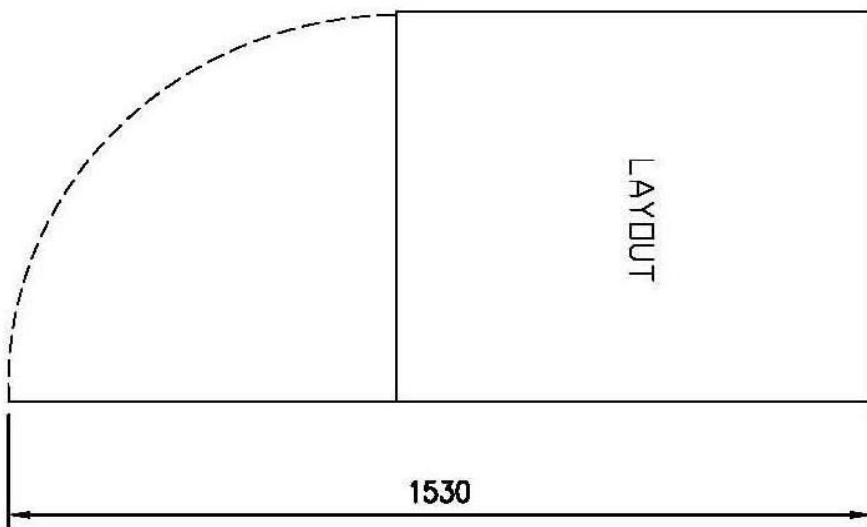

A= ELECTRICAL CONNECTION SCHUKO  
 R= GAS CONNECTION  $\varnothing 8$   $\varnothing 10$



**Phone:**  
 08 9242 7521  
**Head Office:**  
 8 Guthrie Street,  
 Osborne Park WA 6017

**Email:**  
[sales@ableproducts.com.au](mailto:sales@ableproducts.com.au)  
**Web:**  
[www.ableproducts.com.au](http://www.ableproducts.com.au)