

AFINOX

Temperature Range:

+1°C - **+7°C**

Energy Consumption:

Daily Energy Consumption: (kWh/24h)	2
Yearly Energy Consumption: (kWh/Annum)	890
Energy Efficiency Class:	D

Capacity:

Useful Internal Dimensions:	550x650x1385mm
Trays GN:	24 of GN2/1 (Height 40mm)

Specifications:

Dimensions: (WxDxH)	733x839x2090mm
Net Weight:	kg 109kg
Refrigerant Gas:	R134A
Refrigeration Power:	W 383 (-10°C/+40°C)
Electronic Card:	EV3B Digital Control
Compressor:	EMBRACO EMC3117U (Hermetic)
Voltage & Frequency:	V / Hz 230 / 1Ph / 50
Max Current Draw:	A 4.82
Absorbed Power:	W 202 (-10°C/+40°C)
Noise:	DB 50 (5m)
Climate Class:	5 (40°C - 40% RH)

Features:



100% HYGIENIC
NO FINGERPRINT TECHNOLOGY

The Non Smear Coating Advantages:

- Easy to clean
- Appearance & color comparable to S/Steel
- Ecological
- Suitable for food contact
- Made without using PVC

90mm Thick Insulation



Hidden Evaporator



Capacitive Digital Temperature Controller




FROSTY 700 TN

Product Code: 7F070INC5A001



Optional Accessories:



Plastic coated GN 2/1 shelf

SS Pair of Runners



Castor Kit




Sterilizer (Ozonizer)

ABLE


Phone:
08 9242 7521
Head Office:
8 Guthrie Street,
Osborne Park WA 6017

Email:
sales@ableproducts.com.au
Web:
www.ableproducts.com.au

Drawings:

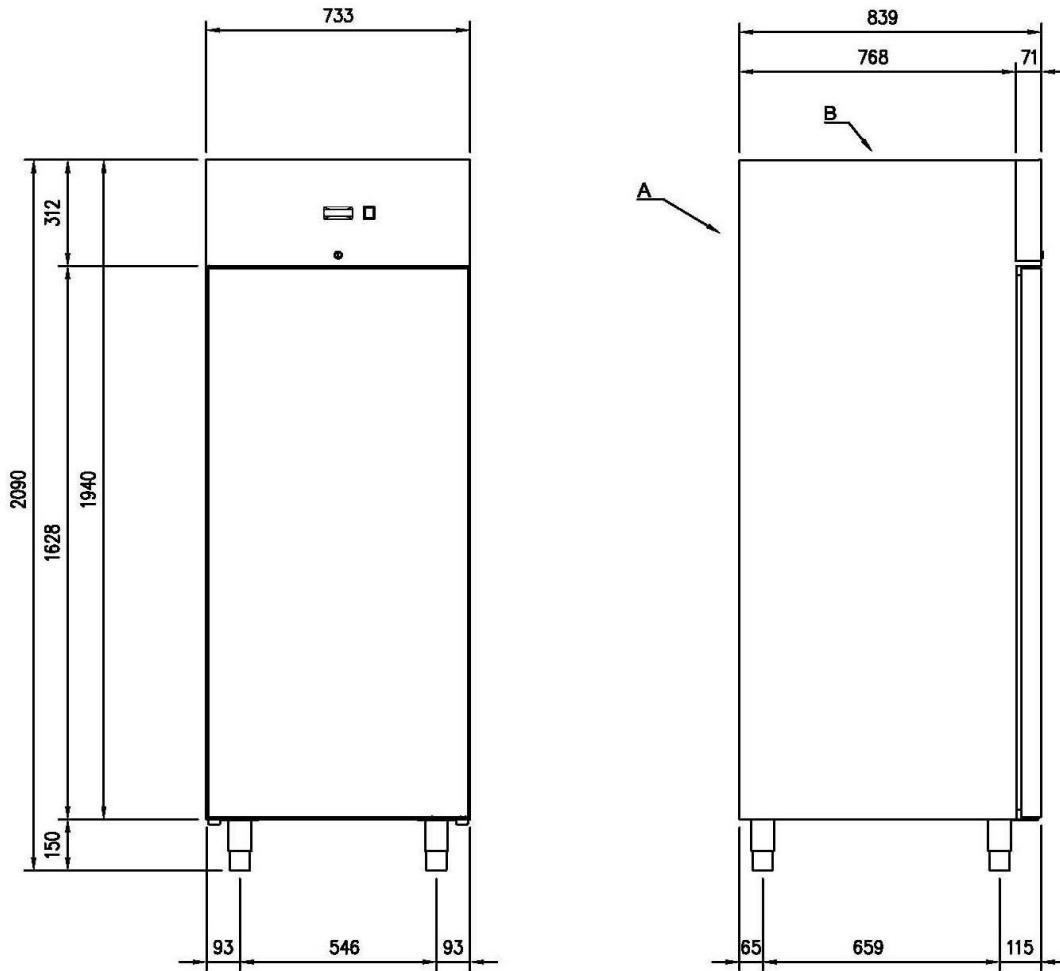

Lay-Out / Top Elevation:

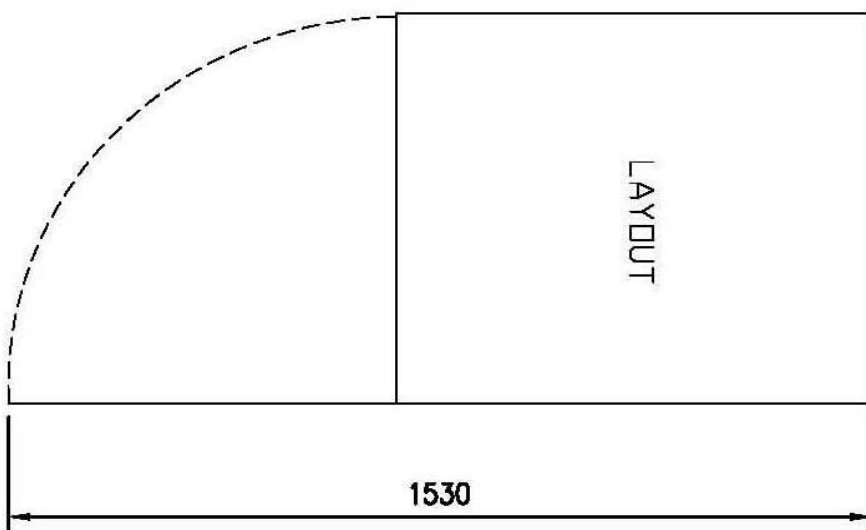

A= ELECTRICAL CONNECTION SCHUKO
B= GAS CONNECTION $\varnothing 8$ $\varnothing 10$

ABLE

Phone:
08 9242 7521
Head Office:
8 Guthrie Street,
Osborne Park WA 6017

Email:
sales@ableproducts.com.au
Web:
www.ableproducts.com.au