

AFINOX

Temperature Range:

-2°C - **+7°C**

Energy Consumption:

Daily Energy Consumption: (kWh/24h)	1
Yearly Energy Consumption: (kWh/Annum)	466
Energy Efficiency Class:	B

Capacity:

Useful Internal Dimensions:	550x650x1385mm
Trays GN:	24 of GN2/1 (Height 40mm)

Specifications:

Dimensions: (WxDxH)	733x839x2090mm
Net Weight:	kg 118kg
Refrigerant Gas:	R290
Refrigeration Power:	W 362 (-10°C/+40°C)
Electronic Card:	EV3B Digital Control
Compressor:	EMBRACO EMC3117U (Hermetic)
Voltage & Frequency:	V / Hz 230 / 1Ph / 50
Max Current Draw:	A 3.8
Absorbed Power:	W 130 (-10°C/+40°C)
Noise:	DB 42 (5m)
Climate Class:	5 (40°C - 40% RH)

Features:



R290 Refrigerant:
A non-toxic gas, completely natural & ecological, with no negative environmental impact.



90mm Thick Insulation



Hidden Evaporator



Capacitive Digital Temperature Controller




ARTIC 700 TN

Product Code:

7F070INC5A002



Optional Accessories:



Plastic coated GN 2/1 shelf

SS Pair of Runners



Castor Kit




Sterilizer (Ozonizer)

ABLE


Phone:
08 9242 7521
Head Office:
8 Guthrie Street,
Osborne Park WA 6017

Email:
sales@ableproducts.com.au
Web:
www.ableproducts.com.au

Drawings:

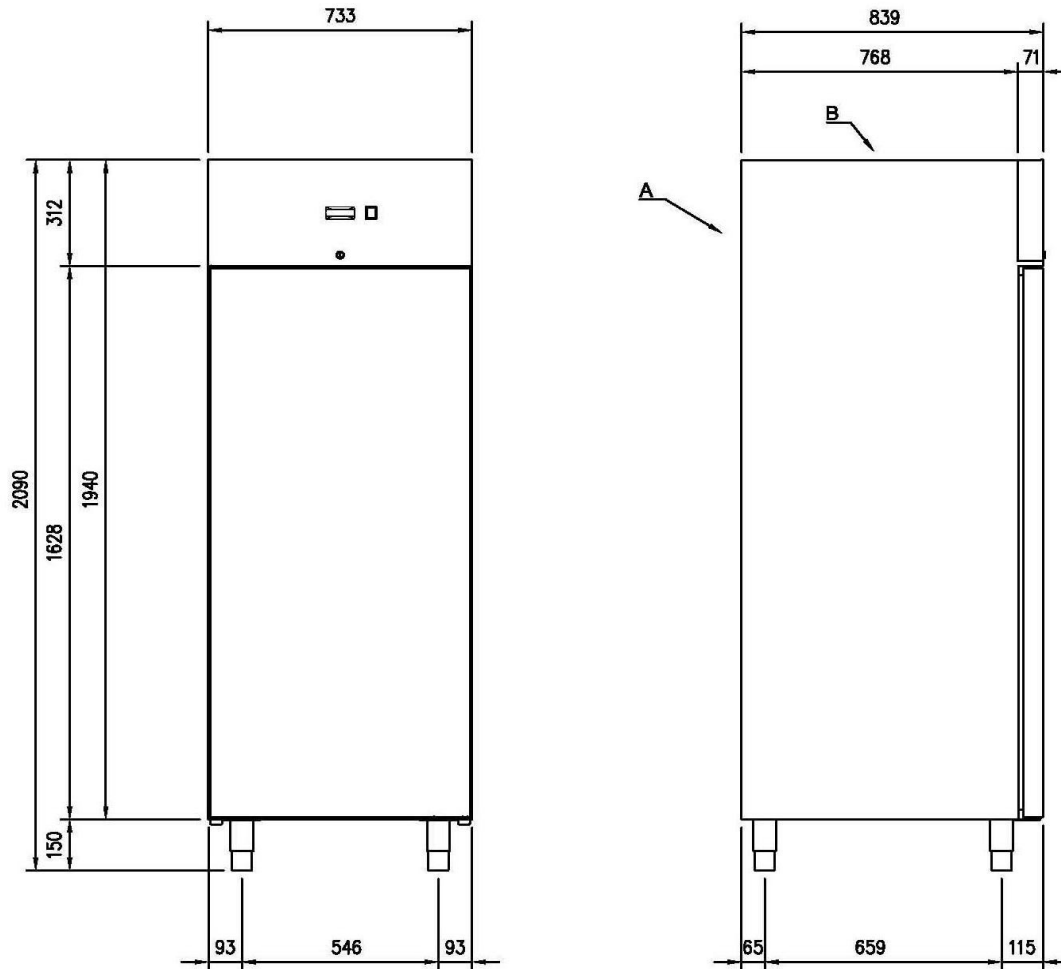

Lay-Out / Top Elevation:

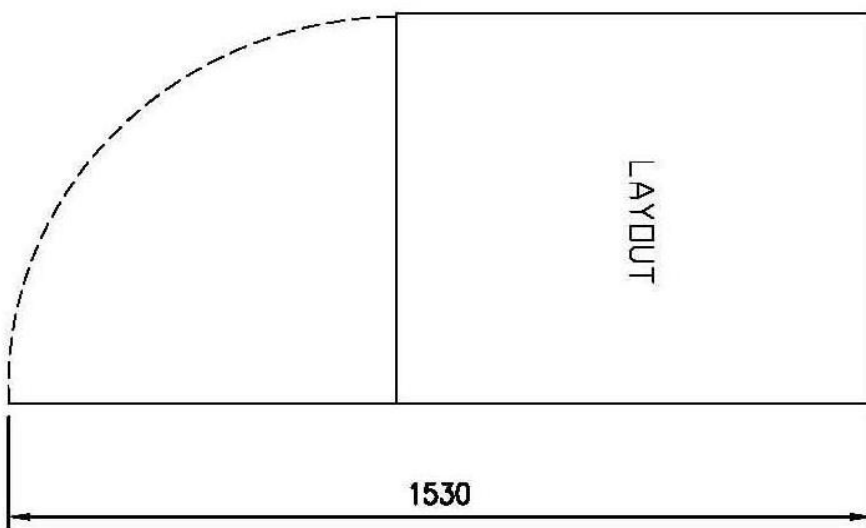

A= ELECTRICAL CONNECTION SCHUKO
B= GAS CONNECTION $\varnothing 8$ $\varnothing 10$

ABLE

Phone:
08 9242 7521
Head Office:
8 Guthrie Street,
Osborne Park WA 6017

Email:
sales@ableproducts.com.au
Web:
www.ableproducts.com.au