

AFINOX

Temperature Range:

-24°C - -10°C

Energy Consumption:

Daily Energy Consumption: (kWh/24h)	19
Yearly Energy Consumption: (kWh/Annum)	6825
Energy Efficiency Class:	G

Capacity:

Useful Internal Dimensions: 550x650x1385mm x TWO

Trays GN: **48 of GN2/1** (Height 40mm)

5L Pans **70 of 5L Pans** (165x360xH120 mm)

Specifications:





Dimensions: (WxDxH)	1466x864x2090mm
Net Weight:	222kg
Refrigerant Gas:	R290
Refrigeration Power:	W 735 (-30°C/+40°C)
Electronic Card:	EVX Digital Control & Touch Panel
Compressor:	EMBRACO NT2180U (Hermetic)
Voltage & Frequency:	V / Hz 230 / 1Ph / 50
Max Current Draw:	A 7.21
Absorbed Power:	W 526 (-30°C/+40°C)
Noise:	DB 53 (5m)
Climate Class:	5 (40°C - 40% RH)

ENERGY 1400 BT PV

Product Code: 7E140IBV5A001



Optional Accessories:

-  Plastic coated GN 2/1 shelf
-  SS Pair of Runners
-  Castor Kit
-  Sterilizer (Ozonizer)

Features:



R290 Refrigerant:
A non-toxic gas, completely natural & ecological, with no negative environmental impact.



Humidity Control
(2 Levels - 60 & 90%)



Intelligent Defrosting System



Automatic Energy Savings Mode



90mm Thick Insulation



Over-Cooling Mode for Peak Periods




Delicate Air-Flow System Design

ABLE


Phone:
08 9242 7521
Head Office:
8 Guthrie Street,
Osborne Park WA 6017

Email:
sales@ableproducts.com.au
Web:
www.ableproducts.com.au

Drawings:

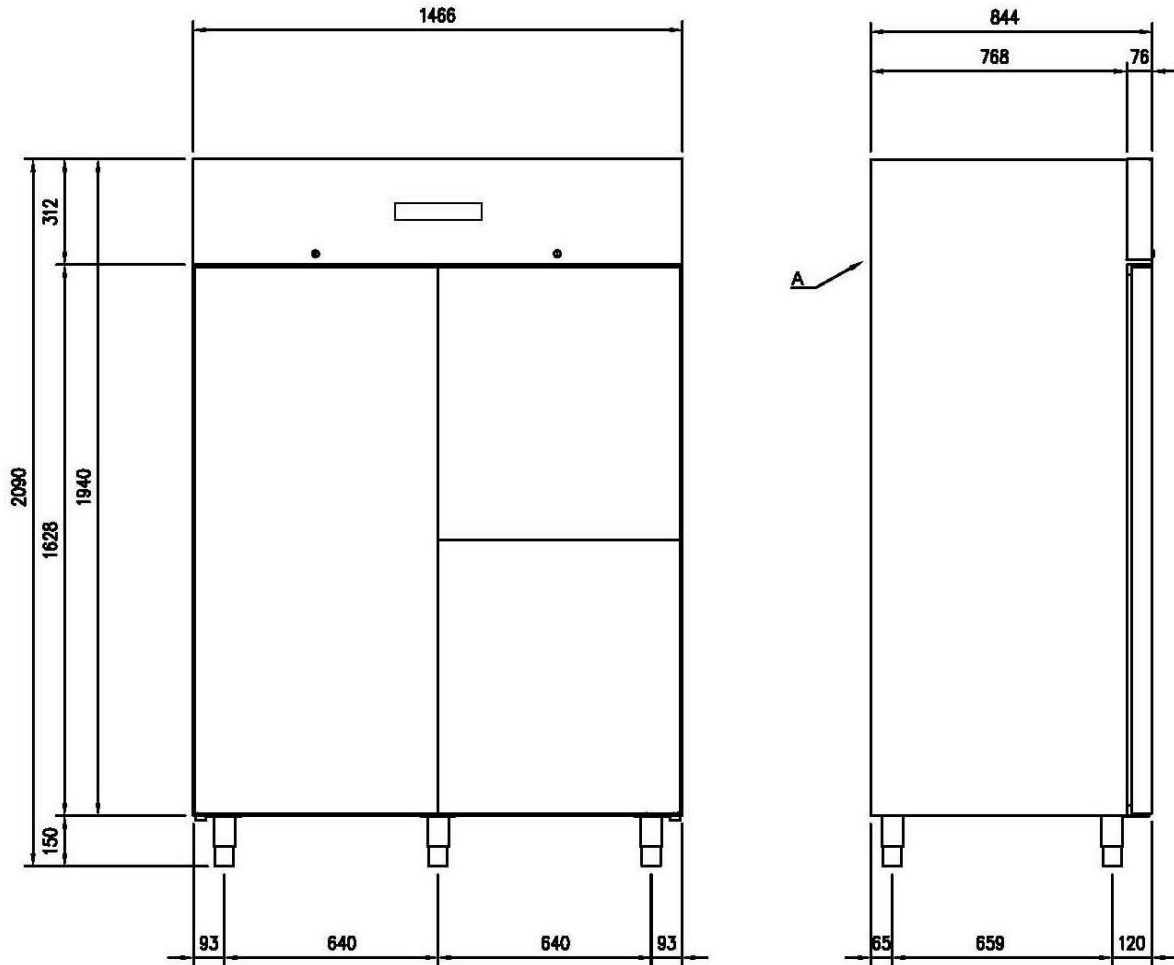

Lay-Out / Top Elevation:

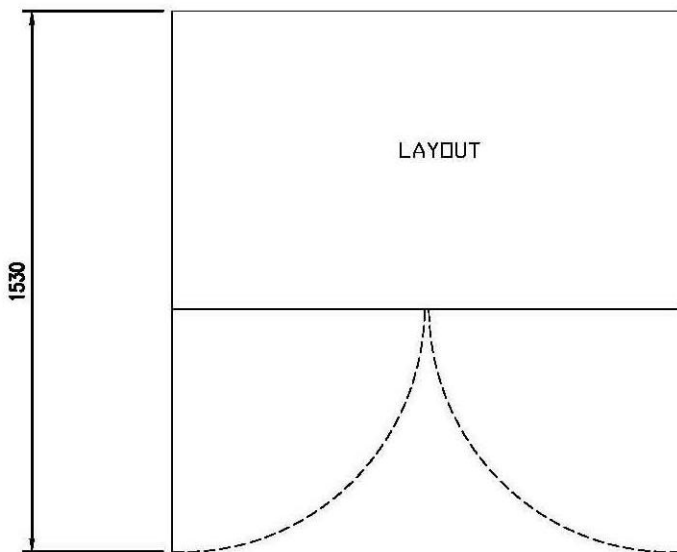

A= ELECTRICAL CONNECTION

ABLE

Phone:
08 9242 7521
Head Office:
8 Guthrie Street,
Osborne Park WA 6017

Email:
sales@ableproducts.com.au
Web:
www.ableproducts.com.au